

# Sileo V2 125 S

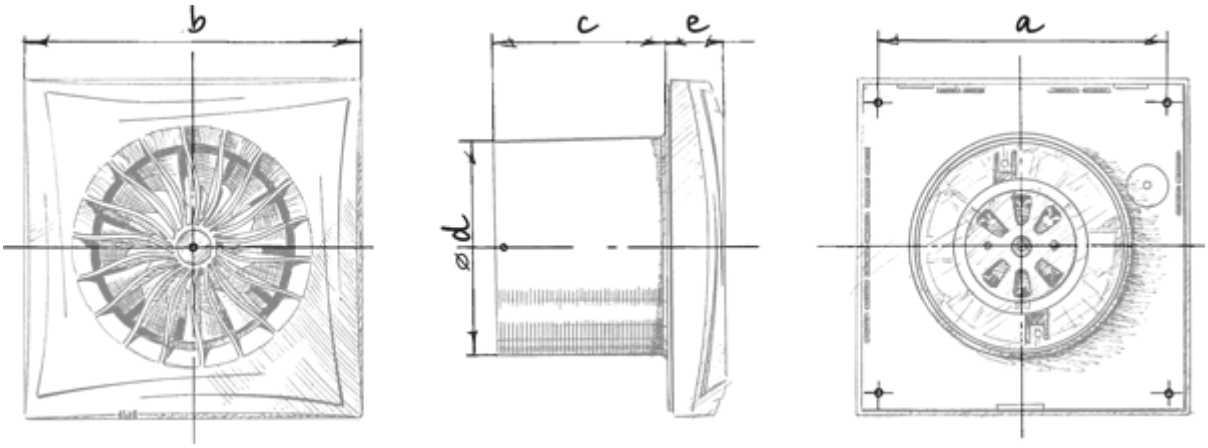
High-performance low noise extract fans

- Casing material: Plastic
- Backdraft protection: Backdraft damper
- Pull cord

| | Unit of measurement | Sileo V2 125 S | |
|---|---|---|---|
| Speed | - | 1 | 2 |
| Minimum supply voltage | V | 220 | |
| Maximum supply voltage | V | 240 | |
| Power supply frequency | Hz | 50 | |
| Maximum airflow | m³/h | 145 | 170 |
| Weight | kg | 0.78 | |
| Ambient air temperature min | °C | 1 | |
| Ambient air temperature max | °C | 45 | |
| Ingress protection rating | - | IP45 | |
| Impeller material | - | Plastic | |

## Dimensions

| a | b | c | Ø d | e |
|---|---|---|---|---|
| 168 | 182 | 91 | 124 | 27 |


b
c
e
a
ød

## Ecodesign

| | | | | | | |
|---|---|---|---|---|---|---|
| Trademark | Blauberg | | | | | |
| Model | Sileo V2 125 S | | | | | |
| Specific energy consumption (SEC) (kWh/(m²/a)) | Cold | | Average | | Warm | |
| | -31.5 | B | -15.1 | E | -5.7 | F |
| Type of ventilation unit | Unidirectional | | | | | |
| Type of drive installed | 2-speed | | | | | |
| Type of heat recovery system | None | | | | | |
| Maximum flow rate (m³/h) | 170 | | | | | |
| Electric power input (W) | 13.5 | | | | | |
| Reference flow rate (m³/s) | 0.04 | | | | | |
| Specific power input (SPI) (W/(m³/h)) | 0.066 | | | | | |
| Control typology | Manual control | | | | | |
| Maximum external leakage rates (%) | 2.7 | | | | | |
| Declared typology | RVU UVU | | | | | |
| Sound power level (dB(A)) | 48 | | | | | |
| The annual electricity consumption (AEC) (kWh/a) | Cold | | Average | | Warm | |
| | 82 | | 82 | | 82 | |
| The annual heating saved (AHS) (kWh/a) | Cold | | Average | | Warm | |
| | 3355 | | 1715 | | 776 | |